

WORKLITE® 22W 48VAC SAFETY BATTERY

SERIALLY CONNECTABLE LED WORK SITE LIGHTING

- Long-lasting, maintenance-free and energy-saving LED work site lighting
- Saves energy by 50% as compared to the fluorescent tube
- Shock and vibration resistant
- Good colour rendering
- Pleasant working light due to smooth spectral curve and good colour rendering
- Available in 230V and 48V extra-low voltage
- Simple installation without the license of an electrician
- Flicker-free light, the leds light up immediately and burn brightly even in frost
- Meets the standards EN 60589-1 and EN 60598-2-22
- Two year warranty
- Registered design for the European market
- Designed and manufactured in Finland



Battery time can be increased to meet requirements

Model and product code:

WORKLite 48VAC Safety 60009002

Structure:


Housing: Cast corrosion-resistant aluminum, powder-coated RAL tone. Available with your own logo and colour.

Handle: Injection moulded polypropylene

The shell: blow-moulded polyethylene neutral

Recyclability: the lamp is fully recyclable

Dimensions (mm)

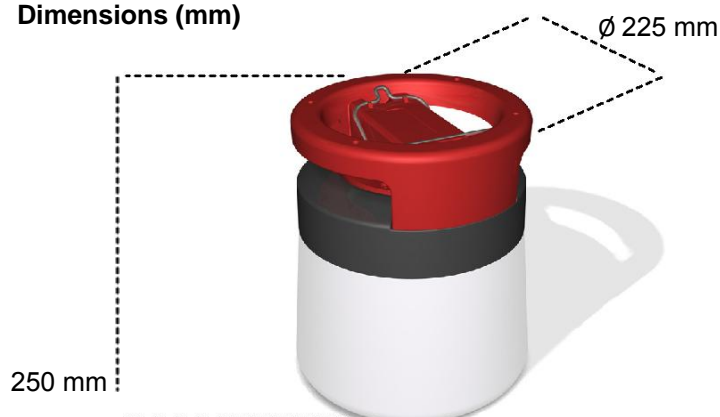

Technical information:

Power:	20 W
Input power:	22 W
The light output:	2904 lm (I=600mA)
Interface device:	standard power supply
Power factor:	0.96
Operating voltage	48 V AC 50 Hz
Power connection:	cable 1,5m 2x1,5mm ²
Operating temp.:	-40 °C to + 50 °C
Colour temp.:	5000K
Colour rendering:	> 80 Ra
The light output:	70% after 50 000 h use
Protection class	IP54
Weight:	1.5 kg
Safety battery:	Lithium
Battery Time:	3x30 minutes on 240lm



Manufacturer:

TSR-Lighting

Turun Sähkö- ja Rakennustukku Oy